


01 抗化学腐蚀隔膜泵 (DVP系列)
DIAPHRAGM PUMP

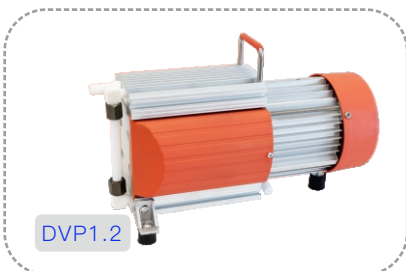

02 产品特点
PRODUCT FEATURE

原装进口配件，稳定可靠
Equipped with permanent magnet motor

保养、维修方便
Convenient maintenance and repair

真空稳定，易于控制抽速
Adjustable pumping speed

体积小、重量轻
Low noise, light weight

完全的抗化学腐蚀能力
Resistance to chemical

可长时间连续工作
Working constantly

03 应用范围
APPLICATION

真空干燥
Vacuum packing

真空浓缩
Vacuum enrichment


旋转蒸发
Rotary evaporation

减压蒸馏
Decompress distillation

离心加速
Centrifugal acceleration

固相萃取
Solid-phase extraction and etc

04 可选配件
OPTIONAL ACCESSORIES

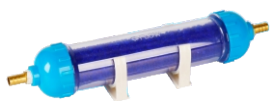

溶液过滤器
Solution filter



粉尘过滤器
Dust filter



前置调节过滤器
Pre-adjustment filter

05

技术参数

TECHNICAL SPECIFICATION

型号 Model	DVP1.2/1.2pro	DVP2pro	DVP4pro	DVP2Dpro	DVP12pro	DVP2Hpro	DVP10pro	DVP8Hpro	DVP8	DVP16
抽速 Pumping Speed (m ³ /h)	1.2	2	4	2	12	2	10	8	8	16
极限真空度 Ultimate pressure (mbar)	≤2	≤3	≤8	≤2	≤8	≤1.5	≤1	≤0.9	≤0.6	≤30
变频调数 Frequency conversion	额定1400转速 Rated at 1400									
安全功能 Safety function	双值电机 Dual-value capacitor motor	变频永磁电机, 电机异常自动保护 Variable frequency permanent magnet motor, motor automatic protection								
抽气头 Pumping head	1	1	1	2	1	1	1	1	1	1
额定功率 Power supply (w)	80	180	360	360	600	360	600	600	400	400
尺寸 Dimensions (mm)	330*143*202	330*143*212	245*252*185	335*252*185	335*252*185	467*234*319	335*252*185	467*234*319	467*234*319	375*200*310
净重 Weight (kg)	7	8	10	10	23	10	23	23	20	20
部件 Components	接触介质部分材质 Wetted parts									
排气阀片 Displacing valve	FFKM									
隔膜片 Diaphragm	三明治结构PTFE "Sandwich Configuration" PTFE									
进气口/出气口 Inlet/Outlet	PTFE									
管件 Fitting	PTFE、PDVF									
进气盘 Inlet plate	加碳纤维增强ECTFE Carbon fiber reinforced ECTFE									
腔体及膜片夹紧盘 Cavity/Diaphragm clamping disc	硬质氧化及特氟龙处理 Harii and teflon									

备注: D-单边两腔 (D means double cavity with single side)

DVP1.2/8/16: 耐一般腐蚀

技术参数若有变更, 恕不另行通知!